


KAZ-TT INFERNO Firebowl, Firepit, and Fire Effects

Owner Manual

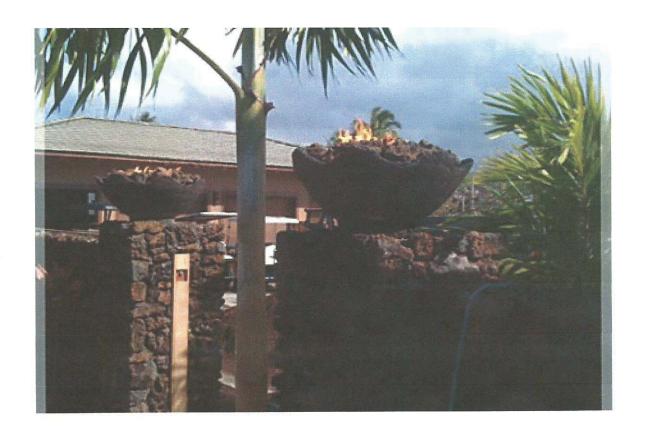

KAZ-TT INFERNO Firebowl, Firepit, and Fire Effects Owner Manual

Globe Expo L.L.C.

KAZ-TT INFERNO firebowl, firepit, and fire effects are an economical solution for applications requiring a safe fire effect. They can be used with standard propane tanks or with natural gas (please specify). The KAZ-TT INFERNO firebowl, firepit, and fire effects have electric ignition, automatic re-strike, and incorporates a flame safeguard controller to ensure a reliable and safe light-off. They also comply with applicable codes and standards. The KAZ-TT INFERNO firebowls, firepits, and fire effects are made to fit most standard firebowls and all custom made firepits and fire effects.

KAZ-TT INFERNO Firebowl, Firepit, and Fire Effects Owner Manual

Globe Expo L.L.C.

KAZ-TT INFERNO Firebowl, Firepit, and Fire Effects Operating Instructions

!!CAUTION!!

Firebowls, fire pits, and fire effects are designed and intended for outdoor use only.

DO NOT place under covered or enclosed patio or eaves.

DO NOT place under low hanging tree limbs or near shrubs.

DO NOT let children play around the fire effects.

Keep away from combustible materials.

- 1. Connect the KAZ-TT INFERNO firebowl, fire pit, or fire effects to a fuel source.
- 2. Apply 24V A/C power cord to switchable power source.
- 3. Turn on the KAZ-TT INFERNO firebowl, fire pit, or fire effects.

NOTE: A flame safeguard has been incorporated in the unit to monitor ignition and flame combustion. If the flame is extinguished by wind, rain or fuel starvation the unit will attempt a relight for 60 seconds.

After the unit is lit the ignition process is complete. If the unit does not light, turn the system off allowing it to reset. Try again in five seconds. If it does not light check the fuel source and make sure all valves are open.

Repair and Maintenance

This system should only be repaired by KAZ Fire Effects certified personnel. To maintain warranty, no repair services can be performed by non-qualified personnel. Periodically use soapy water to check all gas connections for leaks and test function of moving parts.

Specifications

Power requirement per unit; 24V A/C, 50/60 Hz, 1,5 A 30,000 to 350,000 BTU

KAZ-TT INFERNO Firebowl, Firepit, and Fire Effects Owner Manual

Globe Expo L.L.C.

Check list for Safe LP Gas Use:

- 1. DO NOT use firebowls, fire effects on or near combustible materials.
- 2. Inspect equipment daily.
- 3. Secure cylinders in a level, upright position. DO NOT invert or lay cylinders on their sides.
- Use only vapor equipment on cylinders equipped with vapor withdrawal valves. Use only liquid equipment on cylinders designed for liquid withdrawal. DO NOT invert vapor cylinders to dispense liquid.
- 5. DO NOT apply flame to cylinders to increase pressure.
- DO NOT operate firebowls, fire effects or any equipment if the odor of LP gas (butane/propane) is evident. Immediately shut off all valves and, using soapy water, check all equipment for leaks.
- 7. LP gas (butane/propane) is heavier than air, which causes it to accumulate in low areas. Be certain all work areas are well ventilated.
- 8. Keep firebowls, fire effects, open flame, and sources of ignition away from cylinders, regulators, and hoses.
- 9. Cylinder valves must be protected. DO NOT hoist cylinder by the valve.
- 10. Gloves should be used at all times. Long sleeves, long pants, and boots are recommended.
- 11. Never lease a lighted torch unattended.
- 12. This information is provided as a general guide for safe LP-gas use and in no way constitutes a complete safety program.

Daily Equipment Checklist

- 1. Be sure to have a fire extinguisher (type ABC) on the job, easily accessible to each worker.
- Check LP cylinders for dents, damage to collar, damage to valve or corroded foot ring.
 Never hoist a cylinder by the valve. Secure cylinders in an upright position. Know whether you are using LIQUID or VAPOR WITHDRAWAL.
- 3. Visually inspect all parts for damage or wear.
- Using soapy water, check all connections and fittings for leaks. DO NOT use a match or open flame.
- 5. Ignite firebowl, fire effect. Check operation of valve and other adjustable parts.

Safety Notes:

- When extinguishing a torch, shut off cylinder valve and allow gas to burn out of lines.
- Be certain to comply with all safety guidelines and local ordinances regarding the use of an open flame.

KAZ-TT INFERNO Firebowl, Firepit, and Fire Effects Owner Manual

Globe Expo L.L.C.

CAUTION:

- Propane is heavier than air which causes it to accumulate in low areas. Be certain all areas are well ventilated.
- Propane has a distinct odor. If you smell it, immediately discontinue work, extinguish all flames, find the leak and correct it.

WARNING:

Use extreme caution at all times. You are using an intense open flame. Disregard of safe practices can result in severe fire damage, serious personal injury or death.